

CLEANING PROCEDURE

ATTENTION: Always power off the unit and disconnect from power source before cleaning.

Most operational problems can be avoided by regular care and preventative maintenance. Taking regular care of the KBC-3000 Top-Loading Bill Counter will significantly increase its lifetime.

All parts of the KBC-3000 Top-Loading Bill Counter need daily care and cleaning. Pay closed attention to the sensors, which are delicate components. If only dust or other foreign matter adheres to the sensors, it may cause various problems during operation of the machine. Dirty sensors can affect the KBC-3000's performance and cause genuine bills to be rejected. It is suggested that the user performs weekly maintenance on the unit to maintain top performance.



For best results, it is recommended to use an air duster and a soft bristle brush to remove any dusy or debris from the interior of the unit. When not using the machine for an extended period, cover it with the provided dust cover to prevent dust from settling inside.

- To avoid malfunction caused by foreign objects, please clean your machine frequently
- Clean Hopper and Stacker sensors with the provided soft bristle brush or a dry cloth frequently
- Clean the sensors with the provided soft bristle brush or a dry cloth frequently
- Rubber rollers may be cleaned with a slightly damp cloth. You may use a small amount of isopropyl alcohol to dampen the cloth and clean the rollers. Wait until the rollers are completely dry before turning on the machine.

NOTE:

To Clean sensors that are harder to reach you may need to use a Cleaning Card (not included) or air duster (not included)

CLEANING PROCEDURE

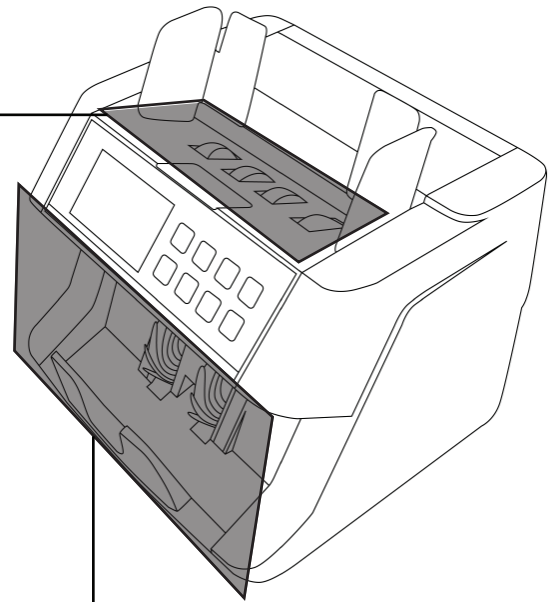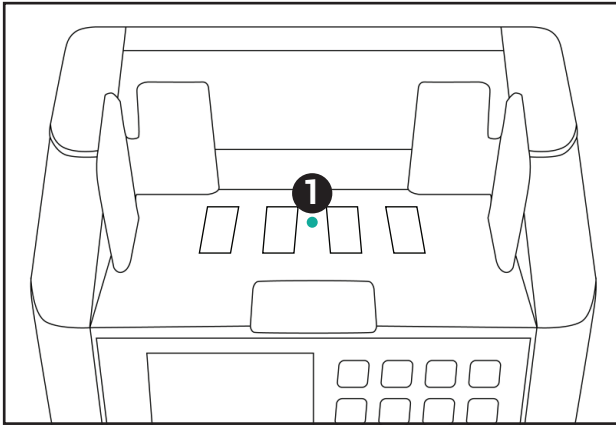

1. Hopper Sensor
2. Infrared Sensor (IR)(not visible)
3. Ultraviolet Sensor (UV)
4. Magnetic Sensor (MG)
5. Stacker Sensor

